
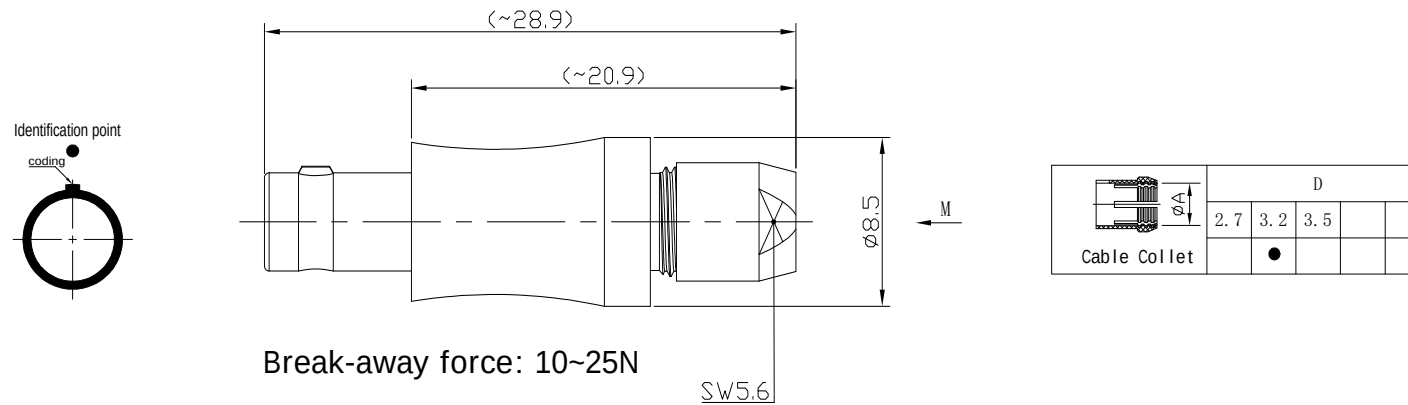







Refer to protection notice ISO 16016
The reproduction, distribution and utilization of this document as well as the
culation of its contents to others without express authorization is
Offenders will be held liable for the payment damages. All rights
reserved in the event of the grant of a patent, utility model or design.

FIGURE AND DIMENSIONS



Parameters

	2芯	3芯	4芯	5芯	6芯
 Solder Side Contact configuration					
Contact Dia. (mm)	0.5	0.5	0.5	0.35	0.35
Testing Vol. (kV)	0.9	0.7	0.7	0.6	0.5
Current Rate (A)	3.5	3.0	2.0	1.7	1.5
Contact Res. (mΩ)	15	15	15	30	30


1	Mating	5000 cycles
2	Working Temperature	-40° ~+200°
3	IP Rating	IP50
4	Insulation resistance	>20 MΩ

Others

Humidity (max): ≤95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Salt Spray Corrosion: >96 hr

01										
标记/Mark		设变内容/Modification contents							签名/Sign日期/Date	
缺省公差mm Tolerance unless specified		设计 Design	伍超正	材质 Material					深圳市锁科电子有限公司 Shenzhen BEXKOM Electronics Co., Ltd.	
>0.5-3	±0.05	绘图 Drawn	徐进荣	重量 Weight		Kg			产品名称 Product name	FFG.00B 4 pins male plug
>3-6	±0.05	审核 Check	张祖桥	比例 Scale	数量 Qua.	图幅 Size	页码 Page	产品型号 Part number		
>6-30	±0.1			批准 Approved	薛逢唐	2:1	1		A4	1/1
>30-120	±0.15			表面处理 Surface finish			图号		Dwg No	
>120-400	±0.2									
>400-1000	±0.3									
>1000	±0.5									
5		6		7		8		9		